



current™


# Adjustable Hanging Kit Instructions #4191

## Orbit Marine PRO Dual LED

### Installation Guide


#### Step 1 - What's Included:

- 2 - Aluminum hanging rails with center slot - A
- 2 - Ceiling mount kits with cable - B
- 6 - Ceiling screws - C
- 6 - Drywall inserts - D
- 8 - Fixture attachment screws - E
- 4 - Hanging kit screw nuts - F

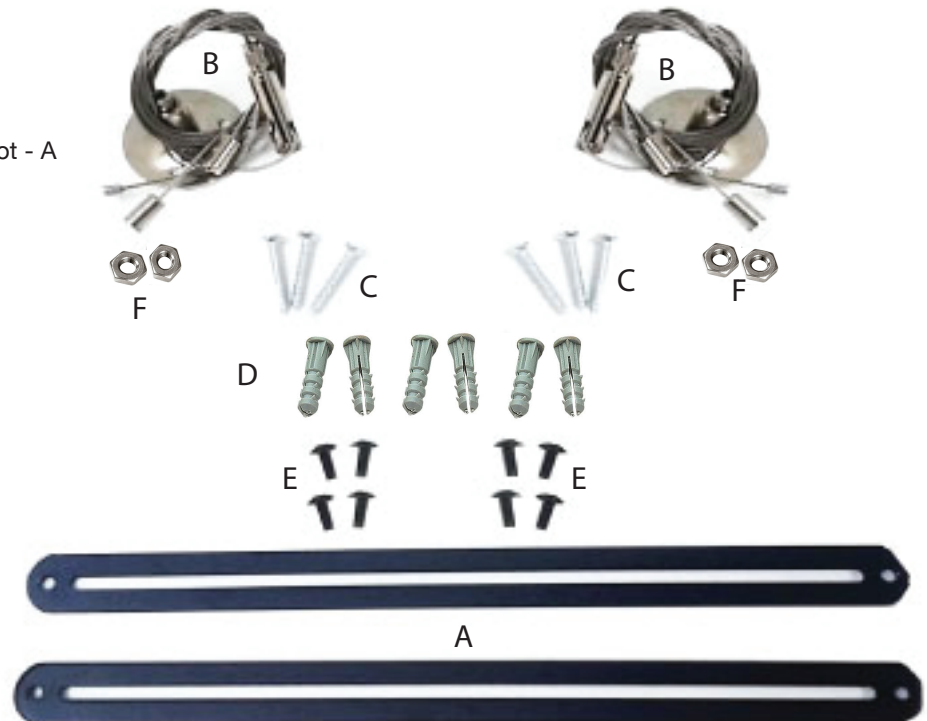


#### Step 2 - Mounting Instructions

1. Unpack the hanging kit and ensure all of the above hardware is included. If you are missing a component, please contact Current-USA directly at [info@current-usa.com](mailto:info@current-usa.com)
2. Unpack Dual Orbit Marine Pro LED strips and remove the wire docking mounts. To remove, hold the light fixture firmly and pull the wire docking mount out of fixture firmly. Removing the docking mounts will take some effort, but the docking mounts are removable.

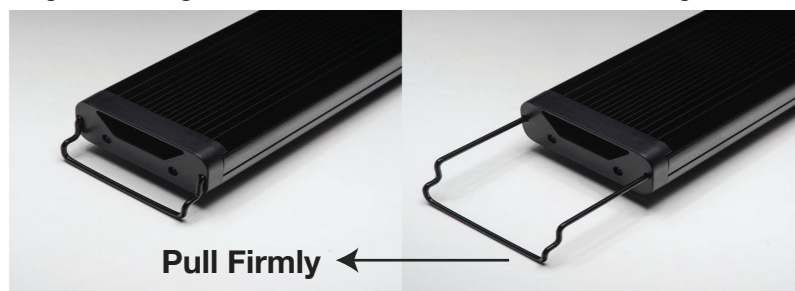

3. For enhanced stability, we recommend mounting the aluminum rails 2" from each end panel of the fixture. Please use the diagram and information below as a reference.

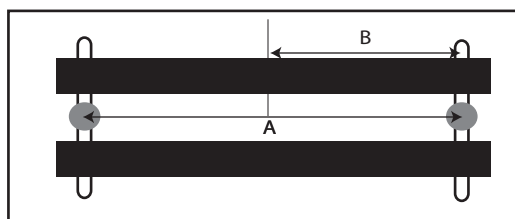

Center-to-center:

- |                      |           |
|----------------------|-----------|
| 24" Dual Kit A = 19" | B = 9.5"  |
| 48" Dual Kit A = 43" | B = 21.5" |
| 72" Dual Kit A = 67" | B = 33.5" |

[www.current-usa.com](http://www.current-usa.com)




current™


## Adjustable Hanging Kit Instructions #4191

# Orbit Marine PRO Dual LED

**4.** Loosen fixture hanging brackets (pre-installed) by loosening screw in track. Slide hanging bracket attachment point to the desired mounting position and re-tighten screw. Set aluminum rail over hanging brackets and attach rail to fixtures using Fixture Attachment Screws E. Note: there should be 4 screws for EACH fixture (2 screws at each end).

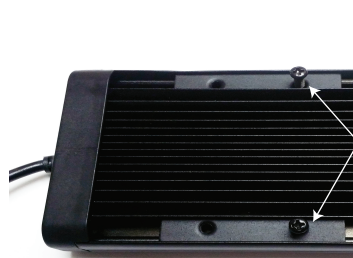

Adjust bracket screws

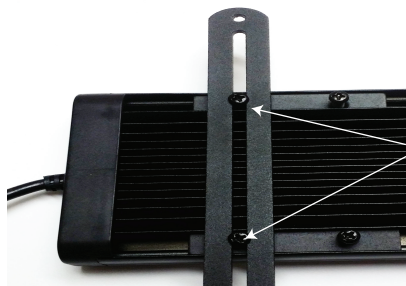


Attach aluminum rail using Attachment Screws (E)

**5.** Using the stud finder, locate a wooden beam or stud on the ceiling to mount the hanging kit. We highly recommend mounting the light to a wood beam versus drywall. If attaching to a wood beam, only the mounting screws are required. If mounting to drywall, the drywall anchors must be used.

**6.** Mark with pencil ceiling attachment points. Measure the center of the tank both lengthwise and width wise from back wall. Mark center point on ceiling using pencil and use B measurements from Page 1 to determine center points of ceiling mounts (B).

**7.** Using ceiling mount, mark three mounting holes for each mount and drill small holes at each location. If screwing directly into wood, attach ceiling mounts to wood using ceiling screws (C). If installing into drywall, insert drywall inserts (D) and mount ceiling mounts using ceiling screws (C). See diagrams below.


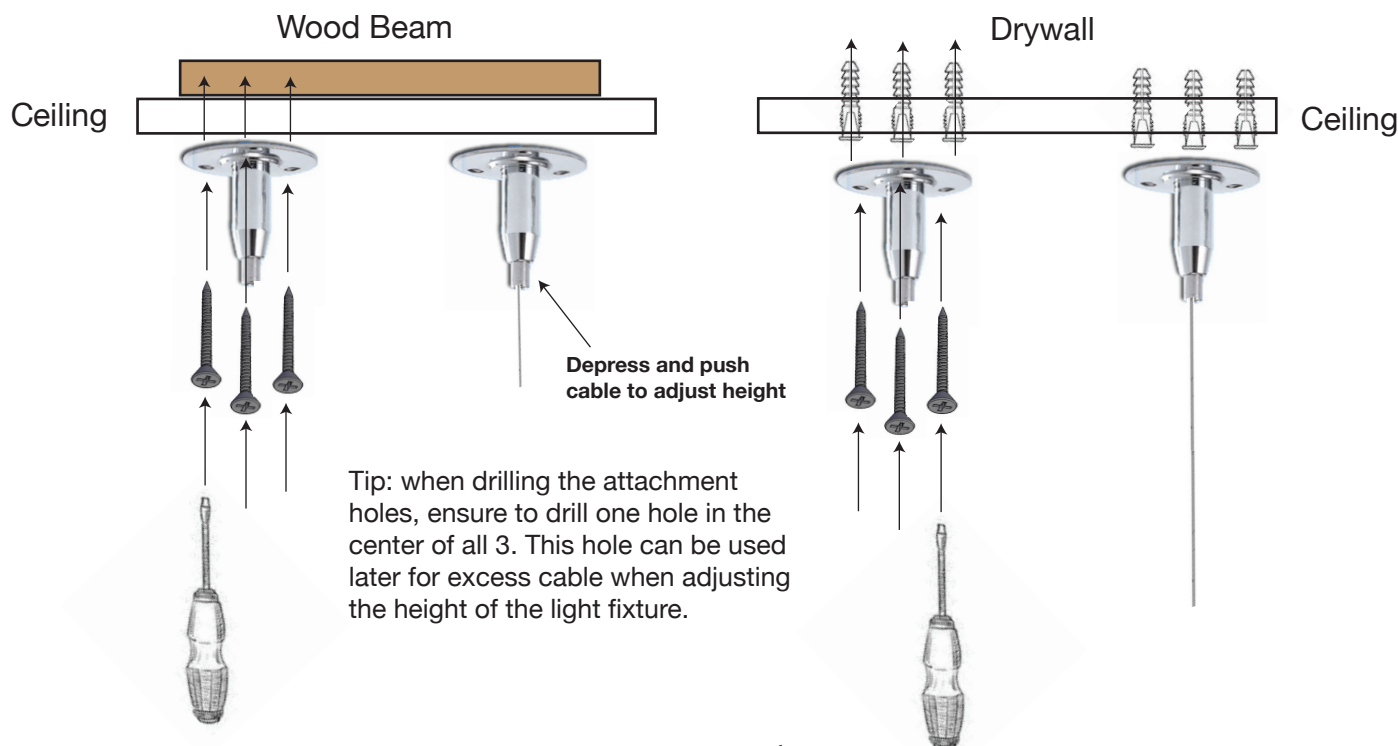




## Adjustable Hanging Kit Instructions #4191

# Orbit Marine PRO Dual LED

8. Adjust cable height by pressing the cable insert at the ceiling mount, and pushing cable into the ceiling.
9. Attach aluminum rail to ceiling mount cable by inserting cable insert mounting screw (E) thru end holes in aluminum rails and tighten nut (refer to diagram below.)
10. Assemble Orbit Marine Pro LED light per the instructions provided. Adjust height by pressing the cable insert at the ceiling point and pushing/pulling cable. To balance the light, slightly unscrew the adjusting screw located at the center of the cable junction and cable will slide freely from left to right. Adjust to balance and tighten screw.

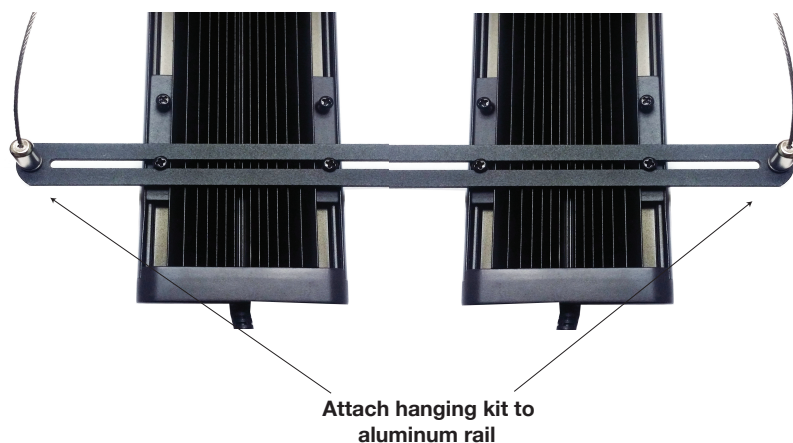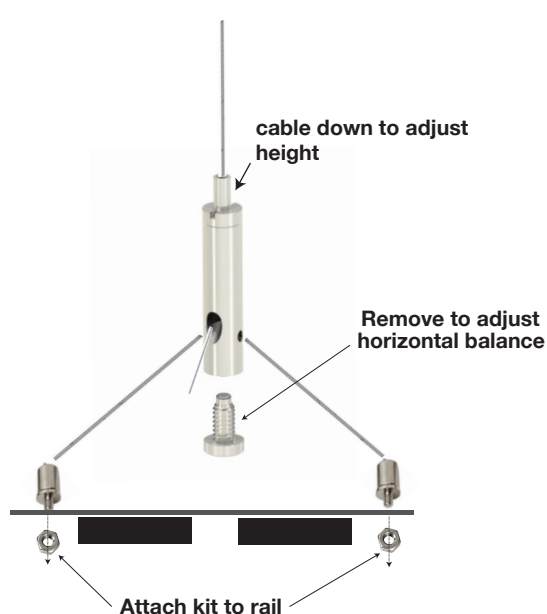

**Warning: This hanging kit is designed for Current-USA LED strips only and is NOT designed for other light fixtures.**